

Technical Information Sheet

Image Coming Soon

UltraPly™ Bonding Adhesive

Item Description	Item Number
Bonding Adhesive	W56TPO3005

Description

Elevate UltraPly Bonding Adhesive is a solvent-based contact adhesive designed specifically for bonding Elevate UltraPly TPO membranes to approved insulations in addition to wood, metal, masonry, and other acceptable substrates. **NOTE: Not for use in adhering UltraPly TPO XR membranes.**

Method of Application

1. Surfaces to receive Elevate UltraPly Bonding Adhesive must be clean, smooth, dry, and free of sharp edges, loose and foreign materials, oil, grease, and other contaminants.
2. Stir the adhesive thoroughly to achieve a uniform mix with no sediment on the bottom and no marbling evident before and during use.
3. Apply UltraPly Bonding Adhesive at about the same time to both the exposed underside of the sheet and the substrate to which it will be adhered to allow approximately the same drying time. Apply UltraPly Bonding Adhesive evenly avoiding areas of accumulation.
4. Apply the UltraPly Bonding Adhesive with a solvent resistant paint roller and roll the adhesive onto the mating surfaces. When applying UltraPly Bonding Adhesive, ensure complete uniform coverage of both surfaces that will be adhered. Care must be taken not to apply Bonding Adhesive over seam areas.
5. UltraPly Bonding Adhesive can be dispensed by means of power rollers or industrial spray equipment. Other equipment may be used as recommended by the manufacturer for application of this adhesive. NOTE: Spray applied bonding adhesive requires back-rolling with 9" (228.6 mm) wide solvent resistant roller (medium nap) to insure 100% coverage of the adhesive on the substrate and membrane.
6. Allow Bonding Adhesive to flash off until tacky. Touch down on the Bonding Adhesive surface with a clean, dry finger to be certain that the adhesive does not string. As you are touching the adhesive, pushing straight down to check for stringing, also push forward on the adhesive at an angle to ensure that the adhesive solvents have flashed off and are ready throughout its thickness. If either motion exposes wet areas or sticking when the finger is lifted, then it is not ready for mating. Flash off time will vary depending on ambient conditions.
7. Starting at the fold, roll the previously coated portion of the sheet into the coated substrate slowly and evenly to maintain position and minimize wrinkles.
8. To ensure proper contact, compress the bonded half of the sheet to the substrate with a stiff push broom using heavy pressure immediately after mating.
9. Contact a Regional Technical Coordinator at 1-800-428-4511 for specific application information.

Storage

- Store in original unopened containers at temperatures between 60 °F - 80 °F (16 °C - 27 °C) until ready for use.
- For optimum results, rotate stock to ensure stored material has not exceeded the shelf life of one year.

Coverage

A coverage rate of 45 - 60 ft² per gallon (1.10 – 1.47 m² per liter) may be obtained depending on the substrate. Some insulation surfaces are more uneven and porous and will result in a lower coverage rate while smooth non-porous substrates will result in higher coverage rates. Rates are based on roller application to both mating surfaces.

Very porous substrates (rough wood, concrete block) may require two coats of UltraPly Bonding Adhesive, to ensure proper adhesion. This can be determined by testing a small area. Check by adhering a small piece of membrane to the porous substrate to verify the bonding strength.

Shelf Life

Shelf life of one year can be expected if stored in original sealed container at temperatures between 60 °F - 80 °F (16 °C - 27 °C). If exposed to lower temperatures, restore to room temperature prior to use. Shelf life will be shortened if exposed to elevated temperatures for a prolonged period.

Precautions

- Refer to Safety Data Sheets (SDS) for additional safety information.
- Flammable. Keep away from fire and open flame and other possible ignition sources during storage and use. Do not smoke when using.
- Harmful or fatal if swallowed.
- Avoid prolonged inhalation. Use only in well ventilated areas.
- Avoid prolonged contact with skin. Gloves should be worn (OSHA approved).
- Avoid eye contact by wearing safety goggles with side shields.
- Thinning is not allowed.
- Do not use for splicing.
- Do not use with EPDM or XR membranes.
- Cover tightly when not in use.
- Recommended cleaner is Toluene (while fluid).

Packaging

- Available in 5-gallon (18.9 L) pail
- Each pail weighs about 41 lb (18.6 kg)

LEED® Information

Post-Consumer Recycled Content: 0%
 Post Industrial Recycled Content: 0%
 Manufacturing Location: South Bend, IN
 NOTE: LEED® is a registered trademark of the U.S. Green Building Council




Typical Properties	
Properties	Value
Base	A blend of Polychloroprene and SBR rubbers
Color	Yellow
Solvents	A blend of Acetone, Hexane, Toluene and Xylene
Solids	≥ 23
Viscosity	3,300-3,800 cps, with R.V.F. spindle @ 10 rpm
Weight/Gallon	6.6-7.4 lb/gal
Specific Gravity	0.7909-0.8868
V.O.C. Content	5.282 lb/gal (633 g/L)

Approved Power Equipment	
Garlock 25ST Roller Boss Power Roller	
4 hp Honda Engine, 4 CFM Compressor, 25-gal pressurized supply tank (20 gal for material; 60-80 psi), Up to 100 psi rating, 2 - 3/4" x 30' supply hoses with swivels, 2 - 18" roller head assemblies	
Garlock 2120 Commander Sprayer	
18 hp Kohler Engine, 4500 psi Rating, 5 Gallon per Minute Flow, 1200 psi Pressure (minimum), Pump Displacement 45:1, GPM Rating: up to 5 gpm, 1/2" x 100' hose, 2" Intake pipe with screen, 5- or 55-gal drum containers, Graco Spray Tip: .023 to .031 diameter hose	

Approved Power Equipment (Continued)

Garlock Twin Gun Airless Sprayer

6.5 hp Honda Engine, 3000 psi Rating, Pump Displacement 30:1, GPM Rating: up to 1 gpm, Up to 400' of single 1/2" diameter hose, Up to 200' of dual 1/2" diameter hose, 3/4" Intake pipe with screen, 5- or 55-gal drum containers, Bulk tank containers, Graco Spray Tip: .019 to .025 diameter hose (1850 psi operating pressure)

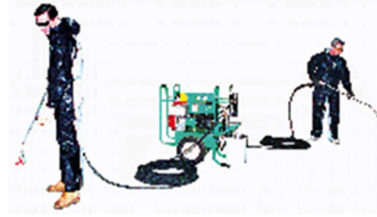

Graco Spray Equipment

P70EC4-70 – 70:1 Xtreme Sprayer Package w/Heavy Duty car, Hopper package, w/NXT motor and Data Track, Xtreme-Duty high pressure hose, 3/8" x 50', 7250 psi, with 1/4" x 6' whip hose, XTR-7 applicator with XHD821-825 tip



Approved Substrates

TIS	Product Name	Approved (✓) / Not Approved
901A	ISO 95+ GL	✓
901B	ISOGARD GL	✓
903	ISO 95+ GL Woodfiber Composite	✓
905A	HailGard Composite Board	✓
905B	ISOGARD HG Composite	✓
909	DensDeck Roof Board	✓
910	DensDeck Prime Roof Board	✓
916	ISOGARD HD Cover Board	✓
917A	Resista	✓
917B	ISOGARD CG	✓
918A	ISOGARD HD Composite	✓
918B	ISOGARD HD Composite	✓
952	Securock Ultralight Glass-Mat	Not Approved
953	Structodek	✓
954	Securock Gypsum-Fiber	✓
956	DensDeck StormX	✓
Substrate		Approved (✓) / Not Approved
EPS		Not Approved
XPS		Not Approved
Fiberglass Insulation		Not Approved
Perlite		Not Approved
Coal Tar Pitch		Not Approved

Approved Substrates (Continued)	
Substrate	Approved (✓) / Not Approved
Structural Concrete (New)	✓
Structural Concrete (Existing) (Clean/Dry/Free of Contaminants)	✓
Steel	Not Approved
Gypsum	Not Approved
Cementitious Wood Fiber	Not Approved
Plywood	✓
OSB	✓
Wood Plank	✓
Lightweight Insulating Concrete (Cellular)	✓
Lightweight Insulating Concrete (Aggregate)	Not Approved
Structural Lightweight Concrete	✓
NOTE: Contact a Regional Technical Coordinator for materials or conditions not listed. All substrates must be clean, dry, free of contaminants or debris and prepared properly prior to application.	

Please contact Holcim Technical Services at 800-428-4511 for further information.

This sheet is meant to highlight Elevate products and specifications and is subject to change without notice. Holcim takes responsibility for furnishing quality materials that meet published Elevate product specifications or other technical documents, subject to normal manufacturing tolerances. Neither Holcim nor its representatives practice architecture. Holcim offers no opinion on and expressly refuses any responsibility for the soundness of any structure. Holcim accepts no liability for structural failure or resultant damages. Consult a competent structural engineer prior to installation if the structural soundness or structural ability to properly support a planned installation is in question. No Holcim representative is authorized to vary this disclaimer.